
DRAWING NUMBER:	01-2557-1-XXXX	
PRODUCT GROUP:	BINDING POSTS	
SUB-GROUP:	COMMERCIAL BINDING POSTS	
DESCRIPTION:	DUAL BINDING POSTS TO DUAL STANDARD BANANA PLUGS ADAPTER	



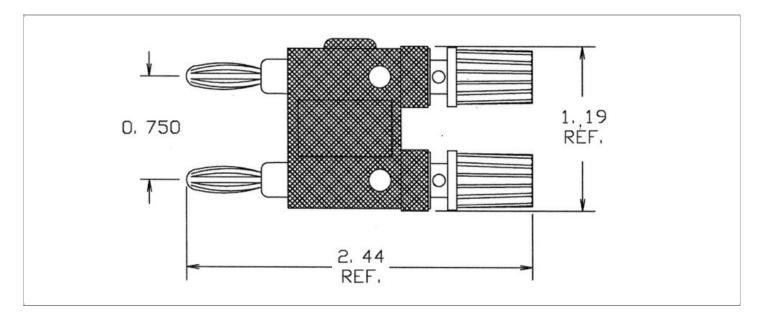

ACCEPTS PIN / PLUG / JACK SIZE	OVERALL LENGTH	BOARD / PANEL MOUNTING METHOD
STANDARD BANANA PLUG/STANDARD BANANA JACK	2.440" MAX.	N/A
MOUNTING HOLE SIZE	DRILL SIZE	BOARD / PANEL THICKNESS
N/A	N/A	N/A

PART NO. STRUCTURE:

01-2557	- 1		XX	XX
PART SERIES	DIMENSIO	N	FINISH	INSULATION COLOR

MATERIAL OPTIONS:

01-2557 -1-XXXX

COMPONENT	MATERIAL	MATERIAL AND SPECIFICATION	
BODY	BRASS	BRASS PER ASTM B16, ALLOY C36000, 1/2 HARD	
HEAD	ABS	ABS PER ASTM D4673	
INSULATION*	ABS	ABS PER ASTM D4673	
JACK SPRING	N/A	N/A	
NUT	N/A	N/A	
WASHER	N/A	N/A	

^{*}For Insulation color, please see INSULATION COLOR OPTIONS on Page 2

DRAWING NUMBER: 01-2557-1-XXXX

FINISH - PLATING OPTIONS:

01-2557-1-XXXX

FINISH CODE	COMPONENT	FINISH	FINISH AND SPECIFICATION
	BODY	BRIGHT ELECTRO-TIN	0.000100"MIN. BRIGHT ELECTRO-TIN PER ASTM B545 OVER NICKEL PER SAE-AMS-QQ-N-290
	HEAD	N/A	N/A
02	JACK SPRING	N/A	N/A
	NUT	N/A	N/A
	WASHER	N/A	N/A
	BODY	GOLD	GOLD FLASH PER ASTM B488, TYPE II, CODE C OVER NICKEL PER SAE-AMS-QQ-N-290
	HEAD	N/A	N/A
03	JACK SPRING	N/A	N/A
	NUT	N/A	N/A
	WASHER	N/A	N/A

INSULATION COLOR OPTIONS:

01-2557-1-XX XX

INSULATION COLOR	BLACK	COMBINATION RED AND BLACK	RED
COLOR CODE NO.	10	00	12

TOLERANCES:*

DECIMAL	FRACTIONAL	ANGULAR	DRAWING ORIGINATION DATE	LAST MODIFICATION DATE
± 0.010	± 1/64	±5°	6/15/1998	5/1/2017

^{*}All dimensions are in inches.

RoHS COMPLIANCE:

01-2557-1-02XX

PART NUMBER	Rohs Compliant
01-2557-1-0200	YES
01-2557-1-0210	YES
01-2557-1-0212	YES

01-2557-1-03XX

PART NUMBER	RoHS COMPLIANT
01-2557-1-0300	YES
01-2557-1-0310	YES
01-2557-1-0312	YES

DESCRIPTION: DUAL BINDING POSTS TO DUAL STANDARD BANANA PLUGS ADAPTER DRAWING NUMBER: 01-2557-1-XXXX

NOTES:

DATASHEET NOTES

INSULATED DUAL 5-WAY BINDING POSTS TO DUAL STANDARD BANANA PLUG (3/4" CENTERS) ADAPTER. FIVE WAY BINDING POST: ACCEPTS STANDARD BANANA PLUG, CLIP LEAD TO SHAFT, LOOP UP TO 14 AWG WIRE AROUND SHAFT AND CLAMP WITH HEAD, INSERT WIRE THRU CROSS HOLE AND CLAMP WITH HEAD, SPADE LUG CLAMPED WITH HEAD. BANANA JACK HOLES FOR SIDE STACKING. CAP COLORS DESIGNATED BY LAST 2 DIGITS OF PART NUMBER: 00 - ONE RED AND ONE BLACK CAP, 10 - BOTH CAPS BLACK, 12 - BOTH CAPS RED. INSULATION IS BLACK. P/N 01-2557-02XX INCLUDES NICKEL PLATED BERYLLIUM COPPER SPRING FOR STANDARD BANANA PLUG. P/N 01-2557-03XX INCLUDES GOLD PLATED BERYLLIUM COPPER SPRING FOR STANDARD BANANA PLUG.

INSTRUCTION NOTES

N/A